APPLICATION

NYU Langone Health

PURPOSE

To ensure adequate life safety protection:

- When egress is obstructed
- When a standpipe, sprinkler, or fire alarm system is impaired
- When Life Safety Code deficiencies cannot immediately be corrected
- During periods of construction and renovation

To comply with federal, state, and local regulations, and NFPA 101, the Life Safety Code

TABLE OF CONTENTS

Section	Title	Page
1.0	Application	2
2.0	Introduction	2
3.0	Responsibilities	3
4.0	Criteria for implementing a fire watch	6
5.0	Criteria for selecting and implementing other Interim Life Safety measures (ILSMs)	7
6.0	Building maintenance: ILSM risk assessment process	9
7.0	Construction/renovation: ILS risk assessment process	9
8.0	Implementation and monitoring of ILSMs	10
9.0	ILS and Interim Evacuation Plans	11
10.0	Standard safety precautions for in-house operations and maintenance	12

Appendix A: Sample Construction/ILS Permit
Appendix B: Construction Safety Inspection Checklist
Appendix C: ILSM Risk Assessment for Routine Work by Facilities Maintenance Employees
Appendix D: ILSM Assessment Tool
Appendix E: NYULH-LI ILSM Assessment and Precaution Plan
Appendix F: ILSM Matrix

EH&S and theNYULH -LI Fire Safety Officer are also responsible for:

accordance with NFPA 13. The NYC and NYS building and fire codes contain additional requirements.

Note: A fire watch is acceptable for a short duration impairment, but is not a substitute for a construction site having an active sprinkler system or a perimeter fire-rated partition.

Real Estate schedules routine inspections for, and correction of life safety code deficiencies at locations they manage, none of which contain patient occupancies.

NYULH staff are well prepared to respond to fire incidents.

All staff complete mandatory annual fire safety training.

Staff participate in routine fire drills, per TJC requirements.

Fire Response Team members participate in additional training.

5.3 TJC Survey Related Plan for Improvement (SPFI.17 Td0 Tc 21. mb2epe 12 -0 0 19dit

6.2 The manager works with the EH&S Fire Safety Program Manager or the NYULH-LI Fire Safety Officer, or their designee, to finalize the risk assessment.

6.3 As needed, the manager coordinates implementation of required ILSMs (e.g., training on life safety code deficiencies and/or alternatives).

7.0 Construction/renovation: ILSM risk assessment process

7.1 During the planning of a construction or renovation project, the PM coordinates an ILS risk assessment. The goal is efficient and effective mitigation of the risk.

7.2 At NYULH-LI main campus and the RAC, the PM uses the NYULH-LI ILSM Assessment and Precaution Plan (Appendix E) to identify and document appropriate ILSMs.

The PM submits the document to Sr. Director of Engineering and Facilities or the Director (Engineering and Facilities) for review.

8.0 Implementation and monitoring of ILSMs

8.1 The PM informs contractors of the Permit and ILSM requirements and pertinent Safety Policies (e.g., Construction Contractor Safety Requirements).

8.2 The PM coordinates implementation of the Permit and ILSM requirements (e.g. posting of signage, training on alternative exits, installation of temporary alarm system, provision of additional fire extinguishers, and informing affected departments).

8.3 During the project, the PM:

Inspects the project site regularly using the inspection checklist in Appendix B or a comparable form, and maintains documentation in the project file.

Works with contractors to ensure prompt correction of deficiencies identified during inspections

Arranges for daily testing if there is a temporary fire alarm system.

9.0 ILS and Interim Evacuation Plans

9.1 When the following conditions arise at NYULH main campus or RAC, the PM prepares an ILS Plan and submits it for approval. At other locations, the PM or manager asks EH&S to prepare an ILS Plan:

The number, type, or severity of life safety code deficiencies places building occupants at noteworthy increased risk.

E.g., when occupying new space in which there are numerous life safety code deficiencies on the “punch list”.

The planned work or an unch /TT3 17224 Theco

9.2 The ILS Plan may include an Interim Evacuation Plan (i.e., a drawing showing temporary evacuation routes)

9.3 NYULH-LI Engineering or an EH&S staff member with an FDNY C of F for Fire Safety Director shall review and accept each ILS Plan before it is finalized.

9.4 The PM or manager shall coordinate implementation of the requirements of the ILS Pd(evid(v)2 (26 (ev)1.d()-6 ( )Tj(n)-4 ((ar)-C -34.99 o Tw [(P)-f 2 (e)4 (26 (ev)1[(s).0

March 2018	Throughout	Updates logo and organizational references
	5.2	Clarifies criteria for selecting and implementing other ILSMs
	7.0	Clarifies Interim Life Safety and Interim Evacuation Pla
	8.9	Clarifies need for daily hot work permit
	Appendix C	Adds appendix – Interim Life Safety Matrix
June 2017	3.2	Clarifies that RED+F Design and Construction reports inspection data to the Construction Safety Committee
	3.4	Clarifies that Security reports inspection data to RED Design and Construction.
	4.0	Adds section, to address, more clearly, TJC requirem for criteria

Sample Construction Safety/Interim Life Safety Permit

NYU Langone Health
Interim Life Safety (ILS) Permit

Reason for Permit: Construction Project	
Location:	
Project Coordinator:	Project Start Date:
Contractor Performing Work:	ProjectCompletion:
Supervisor's Name:	Telephone:
Brief description of project: Demolition, abatement and renovation of existing space.	

The contractor shall comply with all federal, state and local laws, rules and regulations, and NYU
p-4cnlleInndn0 lre M(24 0272.48 5J ET QcTc 0.0120.18i)-2 (t)-2 . , (n0 9.39.4 600nd c)4 0b.

Sample Construction Safety/Interim Life Safety Permit

- Penetrations in floors, walls and ceilings, uncovered or created during the course of the project, must be fire-stopped immediately utilizing NYULH Facilities Operations approved Hilti brand fire-stopping products.
- Chemicals and products used are to be low or no VOC unless specifically approved by the EH&S. Flammable or combustible liquids, chemicals and products shall be stored in an approved fire safety cabinet. Safety Data Sheets (SDSs) for all products shall be readily available on site.
- Debris containers shall be wiped down and capped with plastic prior to leaving the job site. Debris removal and material deliveries to the site shall be made via the service elevators at times when minimal interaction with patients and staff is expected.
- Construction personnel shall wear hard hats and use other personal protective equipment when the work calls for same.
- Construction personnel shall use the right size and type ladder for the work they are performing. A-frame ladders shall not be used in the closed position. Due to the potential electrical hazard metal ladders pose, only fiberglass or wood ladders shall be used. Ladders shall be inspected daily before use. Damaged ladders shall be thrown out. Workers shall not stand on the top 2 rungs of, stand backwards on or straddle, any ladder. Where the work does not allow 3 points of contact to be maintained on the ladder, another more stable work platform (e.g. bakers scaffold) shall be used.
- All(("<BApÖApÔ D MSP >Bb$ Ý.¤ÖFä¤&.!nB,Ò dd

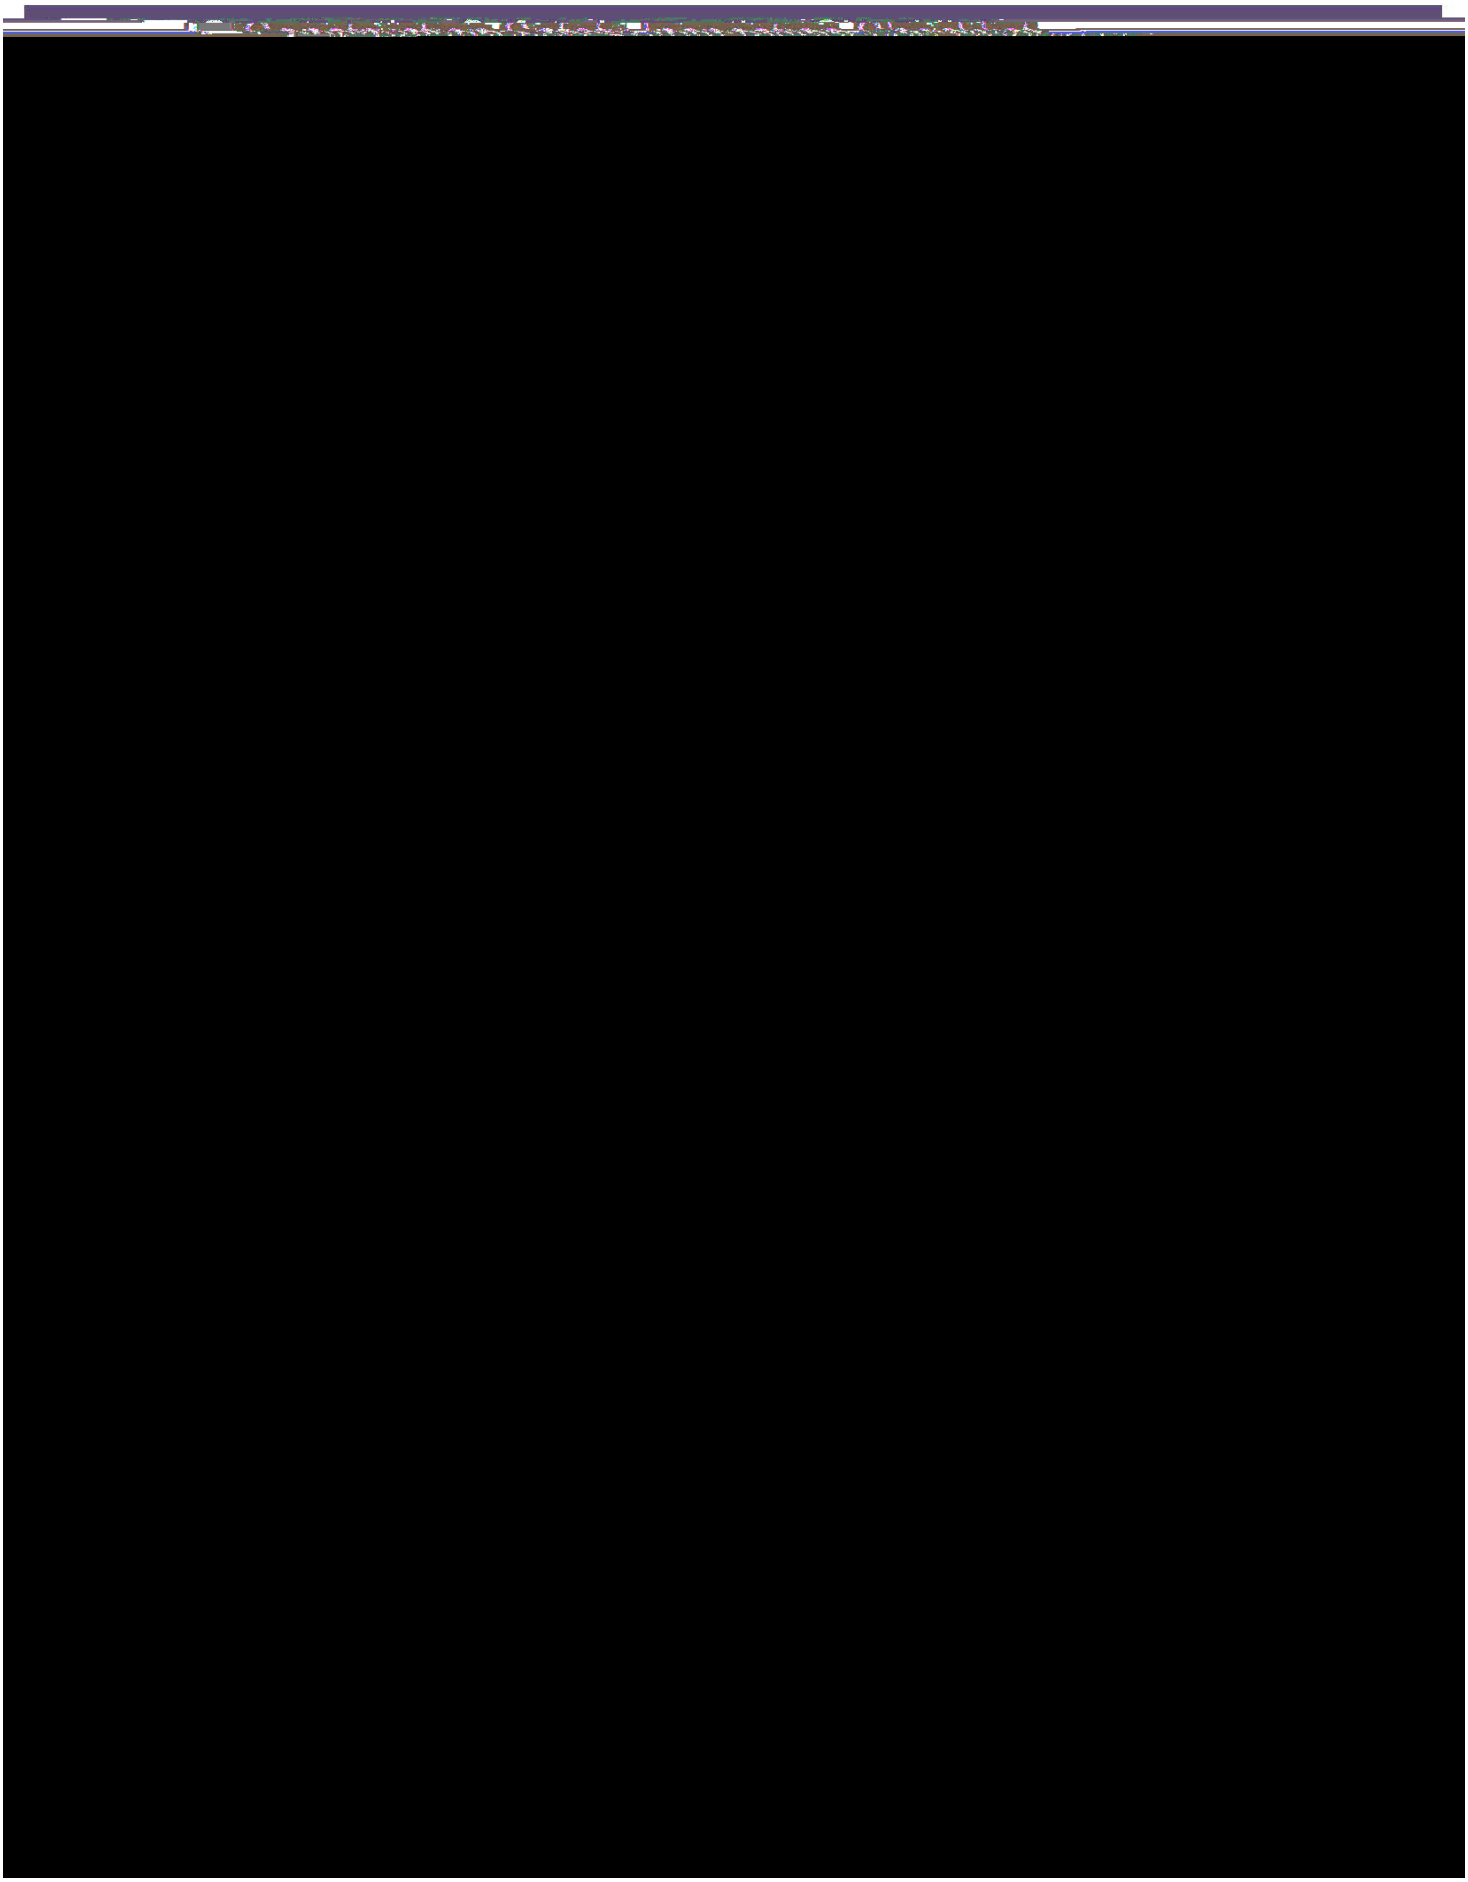



ILSM Risk Assessment Tool

nd/or Identified ssues	

Impact Evaluation

NYULH -LI ILSM Assessment and Precaution Plan

Description of ILSM Trigger	Applicable?	ILSM Precaution # List all that apply

Interim Life Safety Measures Matrix

)9f 2(n)]TJ> EMQ5q> EMng

Date:	
Completed by:	
Project:	
Comments:	
Impairment/Deficiency	Measures to be implemented

Interim life safety permit
Interim life safety plan / evacuation plan
Notify fire department
Fire watch
Alternate exit signage
Inspect exits daily
Occupancy reduced or restricted
Install rated partition/door
Install smoke tight partition
Seal penetrations with fire resistive materials
Additional fire alarm/detection/suppression
Additional fire-fighting equipment
Increased hazard surveillance
Use flame retardant/non-combustible materials
Limit/control/restrict flammables/combustibles
Prohibit staged/stored materials in occupied area
Limit materials stored in construction area
Additional fire drill(s)
Test temporary equipment/systems monthly

Interim Life Safety Measures Matrix

Impairment/Deficiency	Interim life safety permit	Interim life safety plan / evacuation plan	Notify fire department	Fire watch	Alternate exit signage	Inspect exits daily	Occupancy reduced or restricted	Install rated partition/door	Install smoke tight partition	Seal penetrations with fire resistive materials	Additional fire alarm/detection/suppression	Additional fire-fighting equipment	Increased hazard surveillance	Use flame retardant/non-combustible materials	Limit/control/restrict flammables/combustibles	Prohibit staged/stored materials in occupied areas	Limit materials stored in construction area	Additional fire drill(s)	Test temporary equipment/systems monthly	Staff Notification	Staff Training	Other
Impairment of sprinkler system																						
Simultaneous impairment of more tha one fire protection system																						
Impairment of fire protection system last more than 8 hours																						